HEADSET PRODUCT SPECIFICATION SHEET		
Accutone Product Name	**TM610**	**TB610**
General Characteristic		
1. Type	Monaural Over-the-head	Binaural Over-the-head
2. Speaker	Ø40mm x 1pc	Ø40mm x 2pcs
3. Microphone	Ø6 x 5mm	
4. Cord Length	1.5 meters (normal) 3.0 meters (extend) * Including Quick-Disconnect (QD) Connector	
5. QD Plug Connection Life-Cycle	>8,000 times	
6. Plug	4P4C RJ-11 Plug 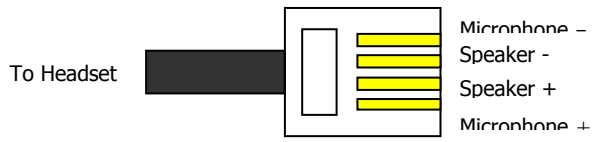	
Speaker Characteristic		
1. Type	Mylar Speaker	
2. Rated Impedance	150Ω±15%	
3. Rated Power Input	10mW	
4. Max. Power Input	30mW	
5. Frequency Range	300 ~ 4,000Hz	
6. Sensitivity	101dB±3dB (SPL/100mV @1KHz)	
Microphone Characteristic		
1. Type	Electret Condenser Microphone	
2. Impedance	2,200Ω	
3. Sensitivity	-58dB±4dB (V/μBar @1KHz)	
4. Directivity	Noise-Canceling	
5. Operation Voltage	2 ~ 10V (DC)	
6. Current Consumption	<500μA	

Jun 10, 2005